

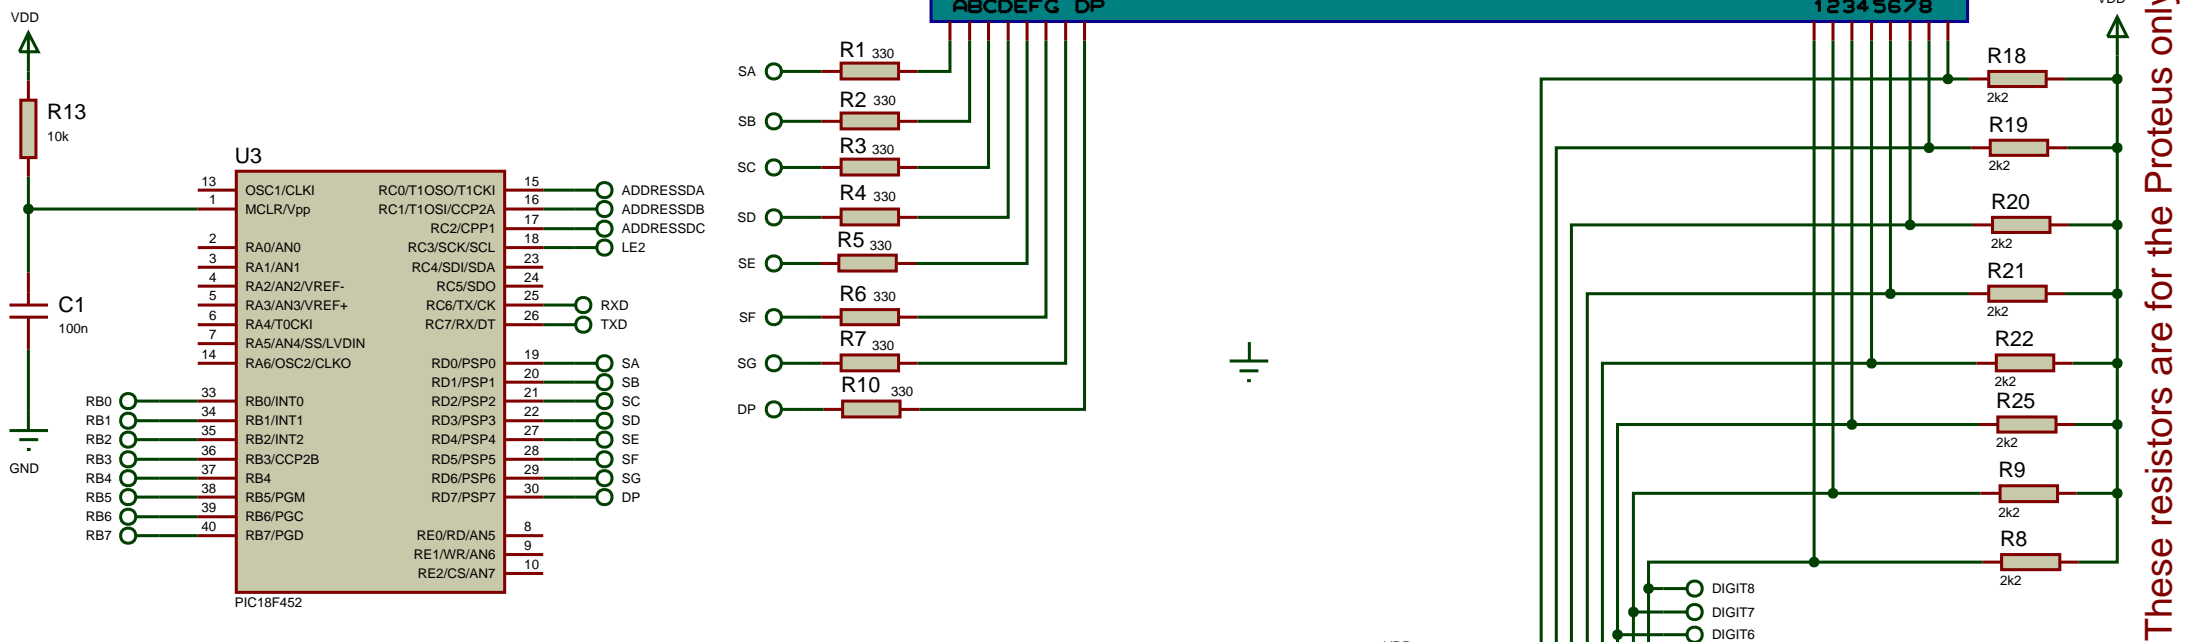


# 8 X 7 Segment Displays COMMON CATHODE DISPLAY WITH DEMULTIPLEXER

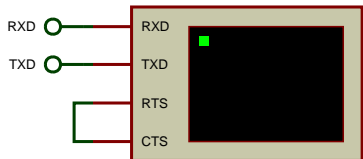

These resistors are for the Proteus only

## Oscilloscope

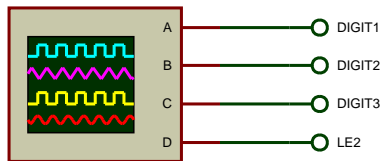

Serial Terminal  
Baud Rate 9600Hz

## PROTON PIC18 8 Displays Evaluation Board

For a 18F452 PICmicro device

Please use the "RSOut8Digits\_Demultiplex\_Lib.Inc" library

